





Featuring  
Custom E-Series Arches (no frame)  
Custom Non-movable Sunburst,  
Slatburst, Blackout (framed), Custom  
Slatburst Moveable and King Stock Full  
Arches, Eyebrow and Quarter Arches,

***Arches, Eyebrows & Specialty Shaped Window Coverings  
Beyond all Expectations  
Explore your Options***




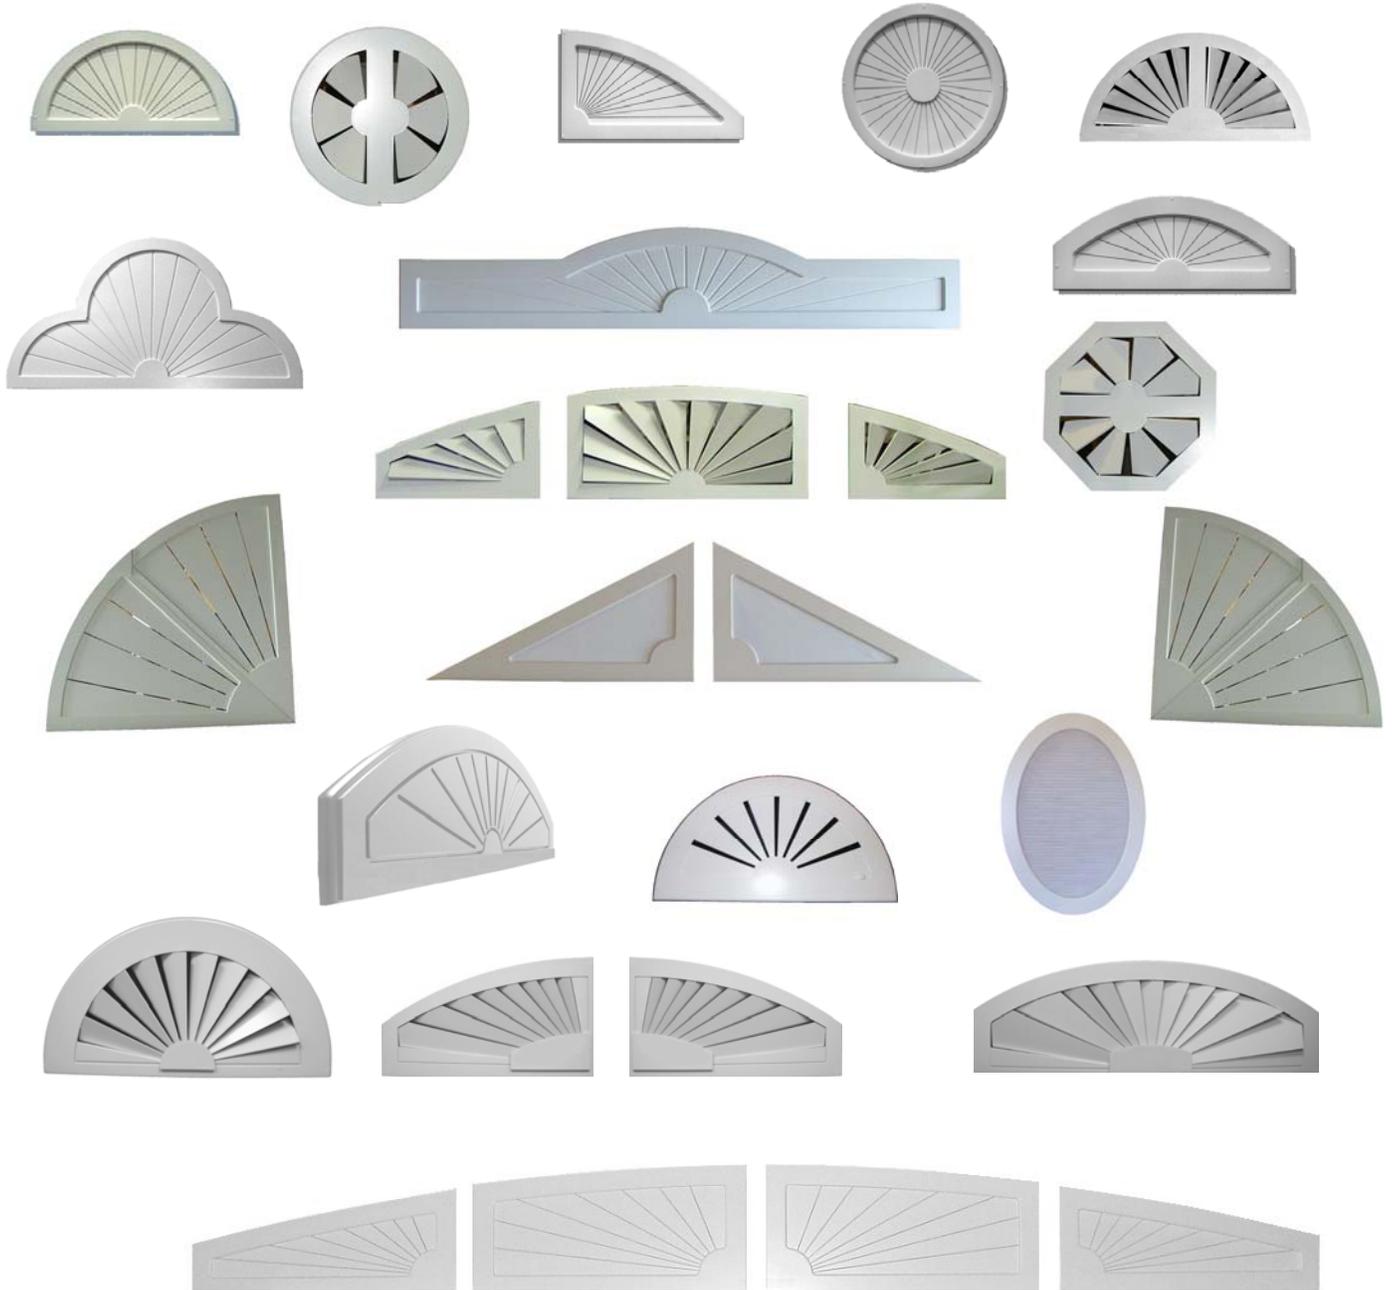


## Eyebrow Window Shapes

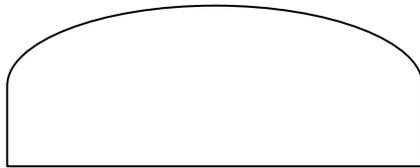

Type 2  
Eyebrow

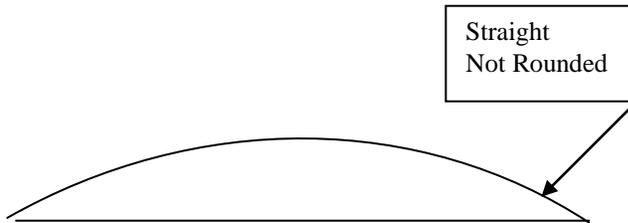


Type 3-s  
Eyebrow

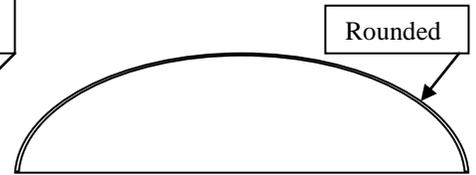

Type 3-r  
Eyebrow

## How to Measure Eyebrows

(Regardless of the shape use the following)

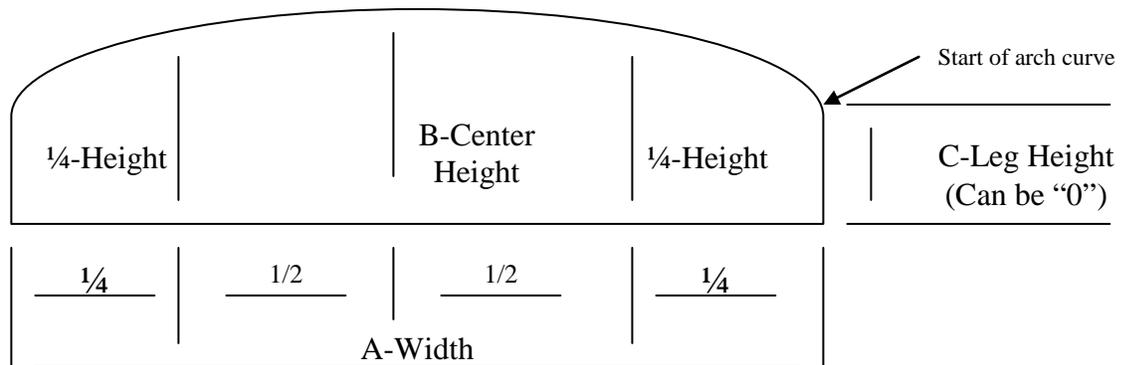

Record the following (actual inside window opening dimensions)

A-Width = .....

B-Height = .....

C-Leg = .....

1/4 width Height (left) = .....

1/4 width Height (right) = .....


Note: Templates are used to verify shape of arch only

# Arch Facts




## #751503- Inside Mounting Strips

- \* All mounting strips are cut to dimensions provided. American Arches will deduct 1/8" inch from all sides of arch to insure a proper fit. Any alterations should be made to the mounting strip, not to the arch for proper fit.

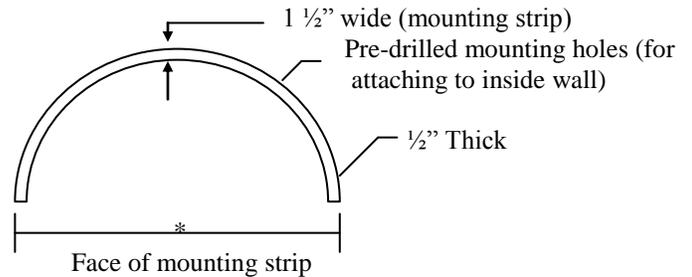

All mounting strips are at an additional cost per arch (all sizes included) and are required for all inside mounted arches.

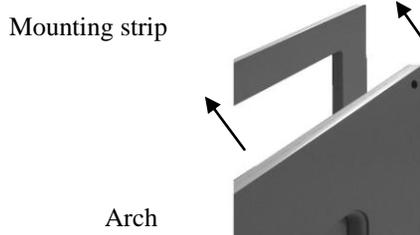

## Installation Instructions for Inside Mounting Strips


**This product was developed by American arches, for the purpose of easy inside mounting of arches without the use of brackets. Please read the following suggestions carefully.**

- Step 1.** Determine the inside depth (the location from the face of the sheetrock to the back of the arch) at which the arch is to be located in relationship to the face of the blind or shutter. Mark this dimension lightly with a pencil to the inside arch opening in several places.
- Step 2.** Place the mounting strip inside the arch opening with the face (front) located at the pencil markings. While holding the strip in place insert the 2 1/2" lg. sheetrock screws (provided) into the predrilled mounting holes and tighten hand tight.
- Step 3.** If light gaps still exist around outer edge, caulk as required.
- Step 4.** Place you American arch onto the face of the mounting strip and install the upper small screws (provided) after proper height is determined.
- Step 5.** Level the arch with the top of the window treatment and insert the remaining small mounting screws (provided) to the mounting strip being careful not to over tighten.
- Step 6.** Lightly tap in the provided button caps over the mounting holes. In some cases you can cut off one of the three tabs on the backside of the button caps for easier installation.
- Step 7.** Clean any remaining handprints from the arch with a soft cloth and mild dish soap being careful not to damage the paint.




## Inside Mounting Strips

\*All mounting strips are cut to dimensions provided. American Arches will deduct 1/8" from all sides of *arch* to insure proper fit. Any alterations should be made to the mounting strip, *not* to the arch for proper fit. Mounting strip over 59" will be shipped in 2 pieces.

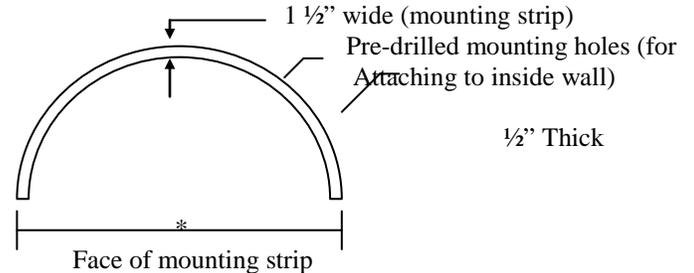

All mounting strips are at an additional cost per arch (all sizes included) and are required for all inside mounted arches.

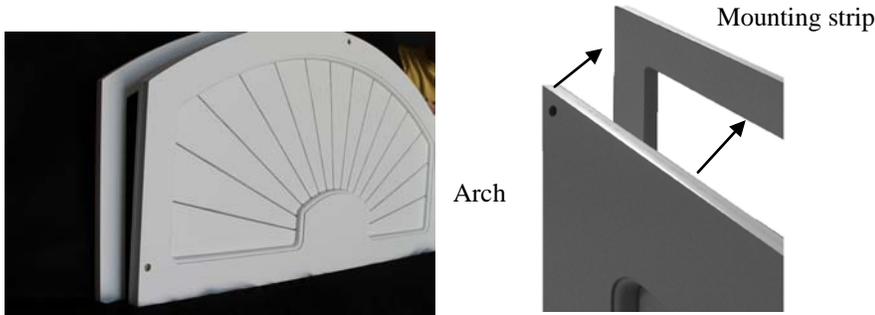

## Installation Instructions for Inside Mounting Strips

**This product was developed by American arches, for the purpose of easy inside mounting of arches without the use of brackets. Please read the following suggestions carefully.**

**Step 1.** Determine the inside depth (the location from the face of the sheetrock to the back of the arch) at which the arch is to be located in relationship to the face of the blind or shutter. Mark this dimension lightly with a pencil to the inside arch opening in several places.

**Step 2.** Place the mounting strip inside the arch opening with the face (front) located at the pencil markings. While holding the strip in place insert the 2 1/2" lg. sheetrock screws (provided) into the predrilled mounting holes and tighten hand tight.

**Step 3.** If light gaps still exist around outer edge, caulk as required.

**Step 4.** Place you American arch onto the face of the mounting strip and install the upper small screws (provided) after proper height is determined.

**Step 5.** Level the arch with the top of the window treatment and insert the remaining small mounting screws (provided) to the mounting strip being careful not to over tighten.

**Step 6.** Lightly tap in the provided button caps over the mounting holes. In some cases you can cut off one of the three tabs on the backside of the button caps for easier installation.

**Step 7.** Clean any remaining handprints from the arch with a soft cloth and mild dish soap being careful not to damage the paint.

For Mounting Hardware see "How to" How to install American Arches



## Custom Non-Movable 2-piece Arches

Large Arches over 59" will be shipped in two pieces to prevent freight damages. View our "How to install Arches" before installation. We suggest that you install the right side prior to installing the left side. Assembled by just sliding together, our overlapping design assures no light gaps after installation. Show below is a 96" wide Sunburst arch. Wider Arches can be manufactured into three or four pieces. For inside mounted arches see "How to" install inside mounting strips.



rev 8-1-16